




CONTI-AIR[®]
BLANKET TECHNOLOGY

CONTI-AIR[®] FSR
All-Purpose Blanket

CONTI-AIR® FSR



Coldset

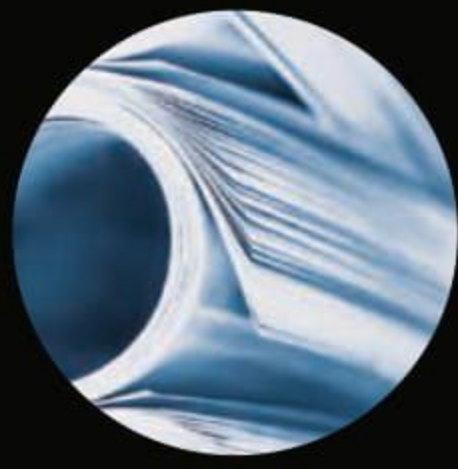

Heatset



Sheetfed



Packaging



Metaldeco

Das robuste Allzweck-Drucktuch für den Offsetdruck.

- › Hohe Festigkeit gegen Kanteneinschnitt
- › Geringer Abrieb
- › Scharfer Raster- und ruhiger Vollflächendruck

The sturdy all-purpose blanket for offset printing.

- › High resistance against edge cutting
- › Low abrasion
- › Good dot sharpness and smooth printing of solids

Technische Daten (Nominalwerte)

Farbe:	blau
Oberfläche:	feinstgeschliffen
Härte Deckgummi:	63° Shore A
Gesamthärte:	80°

Kompressibilität bei 1.350 kPa:	0,190 mm
Dehnung bei 500 N/5 cm:	0,75 %
Dicken:	1,70 / 1,96 mm
True Rolling (Papierförderverhalten):	leicht positiv +



Technical Data (Nominal Values)

Color:	blue
Surface:	microground
Surface hardness:	63° Shore A
Total hardness:	80°

Compressibility at 1,350 kPa:	0.190 mm
Elongation at 500 N/5 cm:	0.75 %
Thickness:	1.70 / 1.96 mm
True Rolling (Paper feed characteristics):	slightly positive +

Unsere Drucktücher verfügen über eine spezielle CONTI-AIR® kompressible Schicht geschlossener Mikrozellen mit Überdruck.

Our printing blankets have a special CONTI-AIR® compressible layer of over-pressured microcells.

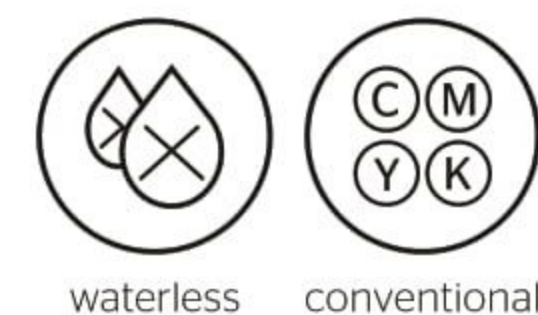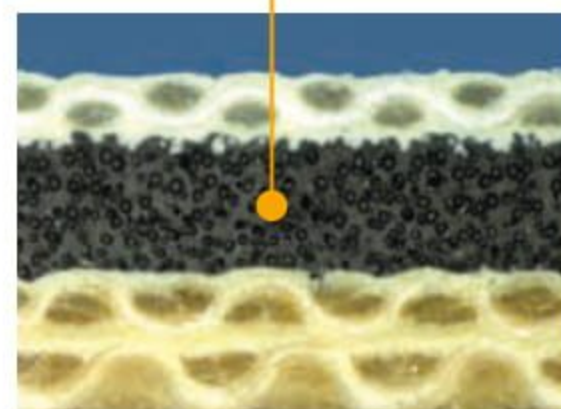

ContiTech Elastomer-Beschichtungen GmbH
Breslauer Str. 14 | 37154 Northeim | Germany
service@contiair.com | www.contiair.com

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2018 ContiTech AG, Hanover. All rights reserved. For complete information go to: www.contitech.de/discl_en

DISTRIBUTORI IN ITALIA DAL 2009



GraphicMediaSolutions